



**Europäisches
Patentamt**

**Eur pean
Patent Office**

**Office eur péen
des brevets**

077651
2042

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02360282.4

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 04/11/02
LA HAYE, LE



Eur päisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 d r Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 02360282.4
Demande n°:

Anmeldetag:
Date of filing: 15/10/02
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
ALCATEL
75008 Paris
FRANCE

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Transmitter for optical MSK signals

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:
Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:
Remarks:
Remarques:

Transmitter for optical MSK signals

5

Technical Field of the Invention

The present invention is generally related to a digital communication system that transfers information over an optical line. More specifically the invention is related to a modulation of optical minimum-shift keying (MSK) signals. Even more the invention deals with the generation of optical MSK signals.

15 Prior Art

The known generation of optical minimum shift keying signals, especially for application at high bit rates, is limited by the bandwidth of available components. Normally this is done by a directly modulated laser diode using the adiabatic chip to generate an optical frequency-shift-keying [1].

Another implementation uses a sinusoidal signal and a cosinusoidal signal which are combined, wherein one signal is delayed by $T=1/R$, generating a signal called offset quadrature PSK (OQPSK) or staggered quadrature PSK (SQPSK) [2].

Background of the invention

For high bandwidth e.g. 40 Gbit/s, due to limited modulation bandwidth, standard available laser diodes cannot be used for MSK signal generation. The proposed invention is one method to generate optical MSK signals at a very high bit rate using available optical components.

35

Summary of the invention

It is therefore an object of the present invention to provide a method and a circuitry for generating an optical MSK signal.

5 The present invention recognizes the possibility that all of the mentioned functions can be performed by a combination of a NRZ-signal with a defined bit rate and a sinusoidal signal with half of the frequency of the bit rate to modulate the optical signal. In an alternative embodiment the problem is
10 solved by a first bipolar RZ-signal with a defined bit rate and a second RZ-signal with the same bit-rate, wherein the second signal is delayed, to modulate the optical signal.

Other objects and advantages of the present invention may be
15 ascertained from a reading of the specification and appended claims in conjunction with the drawings wherein.

Detailed Description

20 Part of the invention is a method of generating an optical MSK signal comprising the steps of generating an optical signal by using a laser, wherein a NRZ-signal with a defined bit rate and a sinusoidal signal with half of the frequency of the bit rate modulate the phase of the optical signal of the la-
25 ser.

A method using the NRZ-Signal (NON Return to Zero) codes a binary value by changing from negative to positive, without going back to zero. Timing is used to distinguish the bits.

30 There are at least two preferred ways to generate the described optical signal. In a first step the optical signal is phase-modulated by using said NRZ-signal. The modulated optical signal will then be phase-modulated by a sinusoidal signal. The steps can be permutated.

The preferred embodiments of the invention are set forth in the dependent claims.

- 5 In an alternative preferred method the NRZ-signal and the sinusoidal signal are combined before modulating the optical signal. The combining is done by a electronic combiner.

The next preferred embodiment uses a bipolar RZ-signal and a
10 RZ-signal wherein one of the signals is delayed. The signals may be combined before modulating the optical signal. It is also possible that each RZ-signal modulates the optical signal phase.

- 15 The method uses a first bipolar RZ-signal with a defined bit rate and a second RZ-signal with identical bit-rate, wherein the second signal is delayed. These signals modulate the phase of the optical signal.

20 Another part of the invention is a circuitry that provides means to run the above mentioned method. Possible means to generate a NRZ-signal with a defined bit rate are electronic multiplexers. An electronic frequency divider is a possible mean to generate a sinusoidal signal with half of the frequency of the bit rate. Optical phase modulators are well-
25 known, e.g. [3].

Combining means, e.g. microwave power combiners combines the NRZ-signal and the sinusoidal signal.

30

In an alternative embodiment a bipolar RZ-signal of a first signal source, e.g. a demultiplexer is combined with a delayed signal of a second RZ-signal-source with identical bit rate. The combined signal is used to modulate the optical signal,
35 with a known modulator e.g. a LN phase modulator [3].

Although no multiple referenced claims are drawn, all reasonable combinations of the features in the claims shall be disclosed.

5

Description of the drawings

For a more complete understanding of the present invention, reference is established to the following description made in
10 connection with accompanying drawings in which:

Fig. 1 shows an implementation with two optical phase modulators;

15 Fig. 2 shows an implementation with one optical phase modulator;

Fig. 3 shows an implementation with one optical phase modulator and one 20 Gbit/s bipolar RZ data signal and one 20
20 Gbit/s RZ data signal.

Figure 1 shows an implementation with a 40 Gbit/s NRZ generator, that interacts with a phase modulator. The peak to peak phase modulation is π . The beam of the CW laser is then modulated with a 20 GHz sinusoidal signal, wherein the peak to
25 peak phase modulation is $\pi/2$.

Figure 2 describes a modification by using only one phase modulator and a combiner combining the 40 Gbit/s NRZ signal
30 and the 20 GHz sinusoidal signal. The signal amplitudes are adjusted in such a way that a peak to peak phase modulation of π for the 40 Gbit/s signal and $\pi/2$ for the 20 GHz signal are generated.

Figure 3 describes a modification of figure 2 by using one 20 Gbit/S bipolar RZ signal and one 20 Gbit/s RZ signal, wherein one signal is delayed by 25 ps . After that the two signals are combined before passed to a phase modulator. The signal amplitudes are adjusted in such a way that a peak to peak phase modulation of π for the two 20 Gbit/s signals is generated.

Claims

1. A method of generating an optical signal comprising the
5 steps of:
- generating an optical signal by using a laser
 - using a NRZ-signal with a defined bit rate and a sinusoidal signal with half of the frequency of the bit rate to modulate the optical signal.
- 10
2. The method according to the previous claim, wherein in a step said optical signal is modulated by using said NRZ-signal and wherein in another step said optical signal is modulated by using said sinusoidal signal.
- 15
3. The method according to claim 1, wherein said NRZ-signal and said sinusoidal signal are combined before modulating said optical signal.
- 20
4. A method of generating an optical MSK signal comprising the steps of:
- generating an optical signal by using a laser
 - using a first bipolar RZ-signal with a defined bit rate and a second RZ-signal with identical bit-rate, wherein the sec-
- 25
- ond signal is delayed, to modulate the optical signal.
5. The method according to claim 5, wherein said first bipolar RZ-signal and said second RZ-signal are combined before modulating said optical signal.
- 30
6. A circuitry to generate an optical MSK signal comprising:
- a laser generating an optical signal
 - means to generate a NRZ-signal with a defined bit rate

- means to generate a sinusoidal signal with half of the frequency of the bit rate
- means to modulate the optical signal by using the output of said means to generate the NRZ-signal and said means to generate the sinusoidal signal.

7. The circuitry according to claim 7, wherein a combining means combines the output of said means to generate the NRZ-signal and the output of said means to generate the sinusoidal signal.

8. A circuitry to generate an optical MSK signal comprising:
- a laser generating an optical signal
- means to generate a first bipolar RZ-signal with a defined bit rate - means to generate a second RZ-signal with identical bit-rate, wherein the second signal is delayed,
- means to modulate the optical signal by using the output of said means to generate said first bipolar RZ-signal and the output of said means to generate said second RZ-signal.
to modulate the optical signal.

9. The circuitry according to claim 8, wherein a means to combine said first bipolar RZ-signal and said second RZ-signal passes the signal to said means to modulate the optical signal.

Transmitter for optical MSK signals

Summary

Part of the invention is a method of generating an optical MSK signal comprising the steps of generating an optical signal using a laser using a NRZ-signal with a defined bit rate and a sinusoidal signal with half of the frequency of the bit rate to modulate the optical signal.

(Fig. 1)

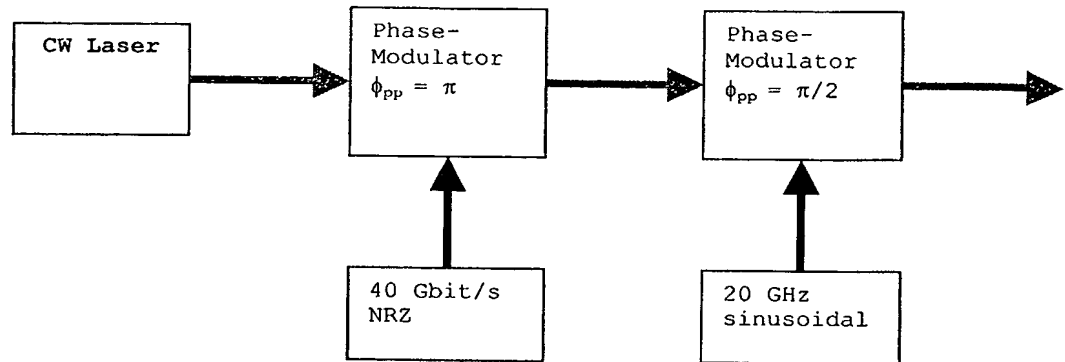


Fig.1

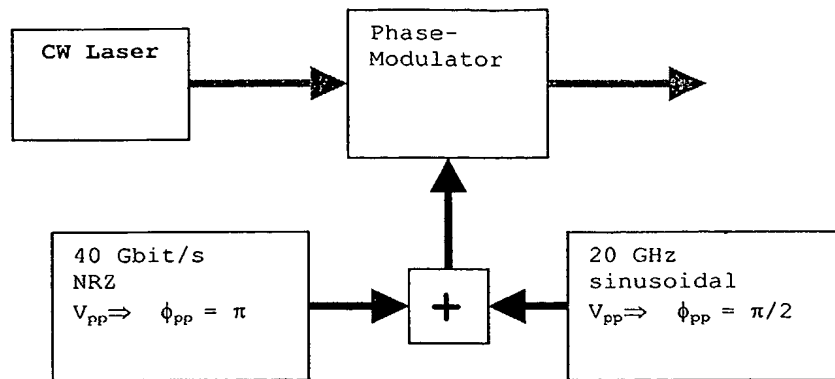


Fig.2

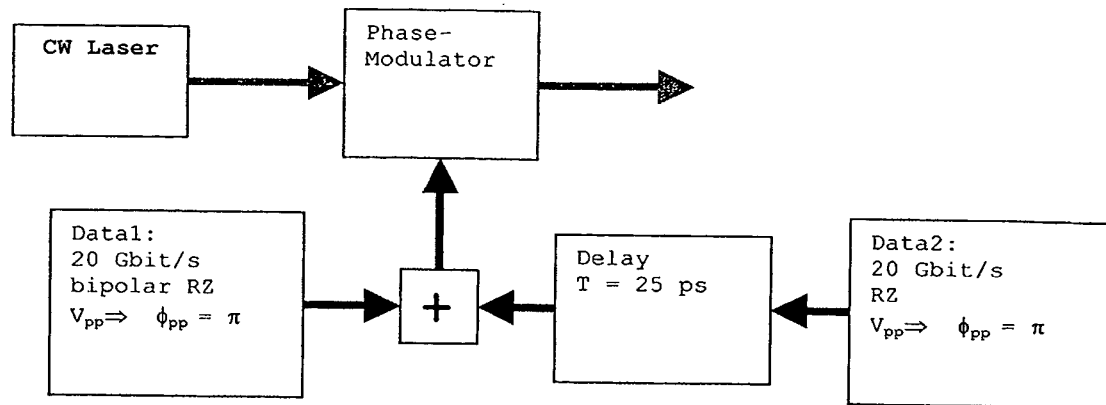


Fig.3

